


Parts list

No.	Qa.	Part No.	Description	Dwg. No.
1	2	9299144006	Pipe nipple 4'' x 300mm	
2	1	9290060156	Socket female 4''	-
3	1	9290641040	Adaptor, socket PVC 110x4''	
4	5 m	9850414685	PVC tube $\phi 110 \times 3,3\text{mm}$	
5	0,3 m	6703471110	Hose $\phi 110\text{mm}$	
6	2	9146070250	Hose clamp 104-138mm	
7	2	9299150110	T-piece 45°, ID 110 (PVC)	
8	2	9299102110	Bend 45°, with sockets 110mm	
9	5	9299111110	Bend 90°, with sockets 110mm	
10	3 (2)	9299080110	Socket, ID 110mm	
11	3	9290201514	Reducer $\phi 110 \times \phi 75$, PVC	
12	1 m	9850412227	PVC tube $\phi 75 \times 2,2\text{mm}$	
13	1,5 m	6703471075	Hose ID $\phi 75$	
14	8 (6)	9146075080	Hose clip $\phi 80$ (left)	
15	1	9129900006	Glue (PVC) 0,5 L	

3 (2) means 3 pcs supplied, 2 pcs. drawn

The items, shown in the part list, provides the shown connection possibilities.

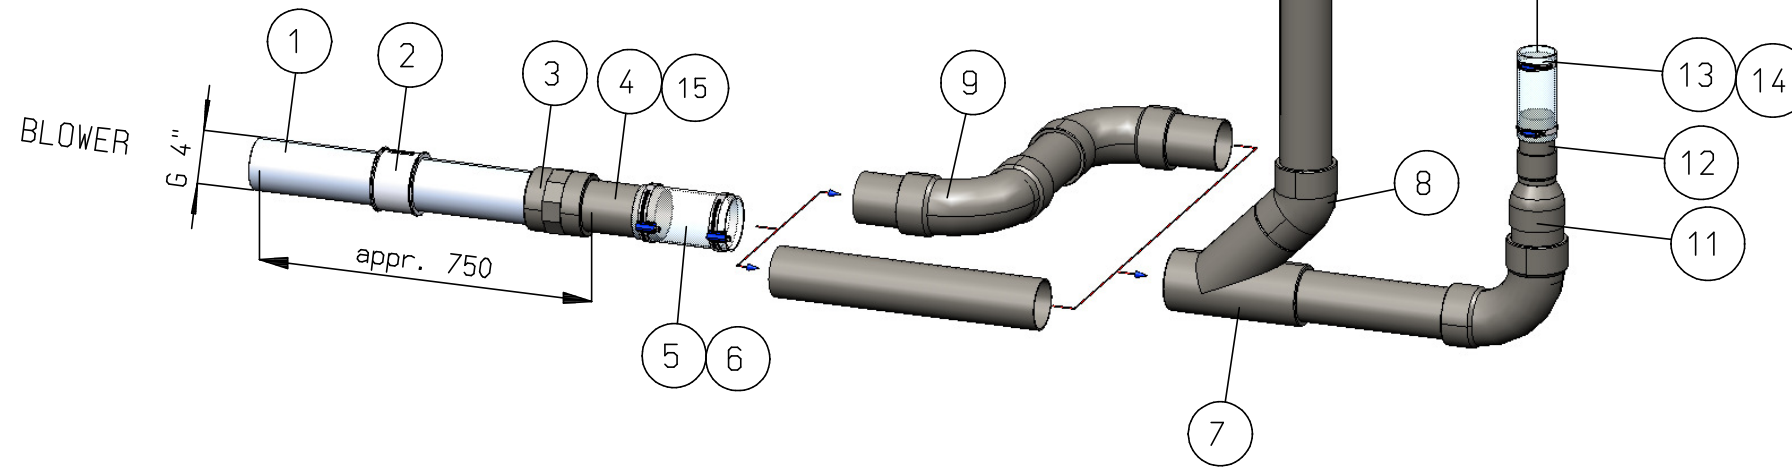

NOTE 1: Use the number of pipe nipple as delivered.
Air at blower side will heat up,
therefore first iron ducting required.

NOTE 2 Keep the ducting as short as possible.
Every bend, joint, connector of system accessory
contributes a certain loss of pressure
(friction of moving air).

Roughness acc. to ISO 1302	Dimensions tolerated acc. to ISO 129	Tolerances of form and position acc. to ISO 1101	Dimensions in mm.	-	-	-	-	-	-					
SIMCO ION An ITW Company www.simco-ion.nl Tel: +31 (0)573 288333				(XX) Control dim. Copyright © SIMCO (Nederland) BV		Rev. Description			Chk.	Date				
						Range (mm)	0,5 - 3	>3 - 6	>6 - 30	>30 - 120	>120 - 315	>315 - 1000	>1000 - 2000	>2000 - 4000
						middle	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
rough	±0,15	±0,2	±0,5	±0,8	±1,2	±2	±3	±4						
Name: Ducting configuration 3-150-4" (appr. 7,5m)								Drawn: BSG	Part no.: 1485341030					
CAD GENERATED NOT AUTOMATICALLY UPDATED		Date: 7-3-2013	M: 1:16	A3	Check:		Dwg. no.: 14853430							